

02/2014


Mod: DFV-1011/N

Production code: E2 RDA-110E ER 06DI 52



Diamond
catering equipment

5 x 2/3 GN / 5-10-15 x 1/1 GN ANALOGIC

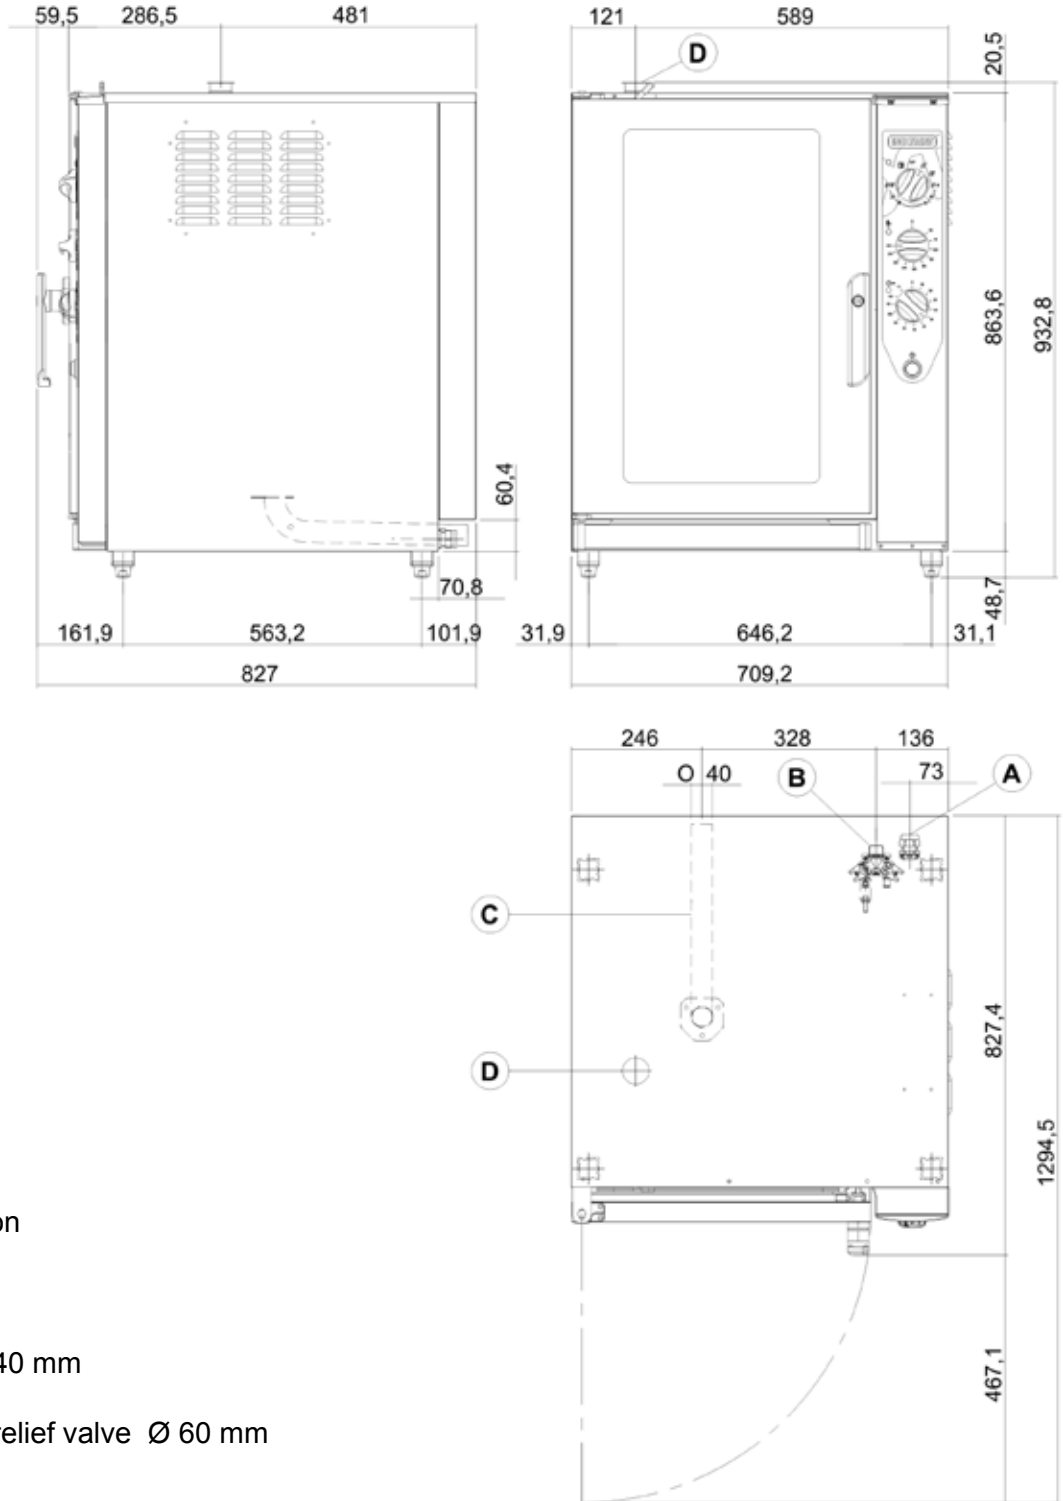

A- Electrical connection

B- Water inlet Ø 3/4"


C- Water drainage Ø 40 mm

D- Cooking chamber relief valve Ø 60 mm

10 x 1/1 GN

0.1C Dimensions mod. 10 x 1/1 GN			
Model	Dimensions	Capacity	Trays distance
10 x 1/1 GN Electric	cm 71 x 83 x h 91	10 x 1/1 GN 20 x 1/2 GN	67 mm

5 x 2/3 GN / 5-10-15 x 1/1 GN ANALOGIC

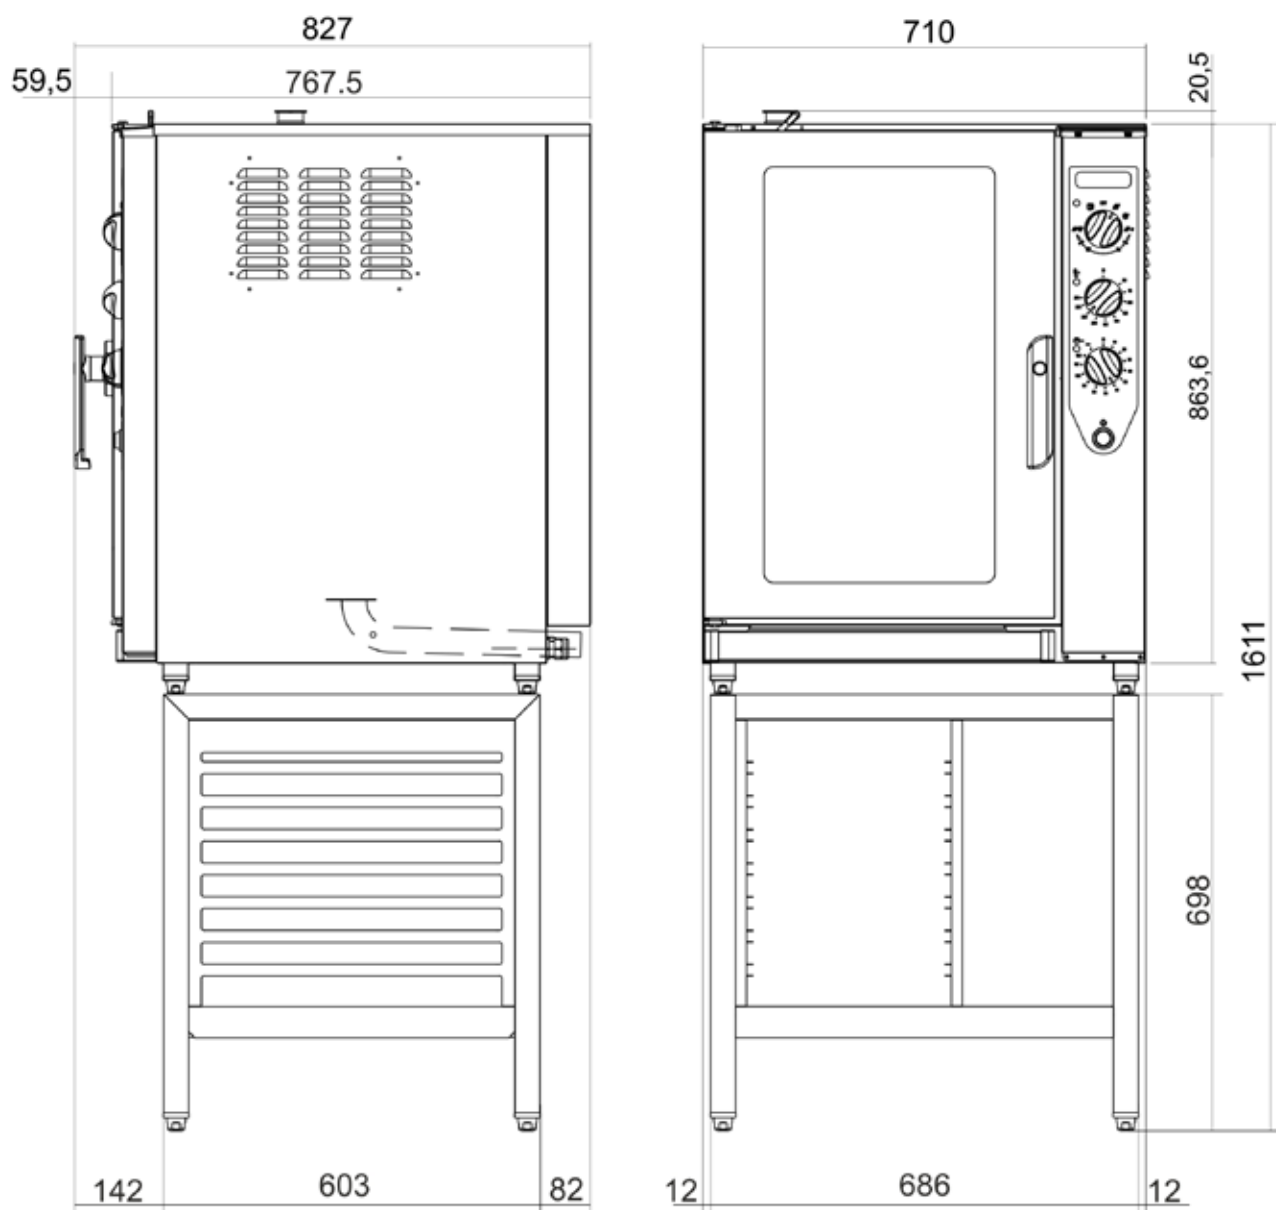

10 x 1/1 GN + SG-51R

0.1G Dimensions mod. 10 x 1/1 GN + stand			
Model	Dimensions	Capacity	Trays distance
10 x 1/1 GN Electric	cm 71 x 83 x h 163	10 x 1/1 GN 20 x 1/2 GN	67 mm

5 x 2/3 GN / 5-10-15 x 1/1 GN ANALOGIC**1.6 TECHNICAL DATA FOR ELECTRICAL CONNECTION**

Model	Power loading and voltage	no. and motor power	Heating power	Absorbed current	Feed cable section
5 x 2/3 GN	5 kW 400 V+3N~50/60 Hz	1 x 250 W	4.8 kW	8.5 A	5 x 1.5 mm ²
5 x 1/1 GN	6 kW 400 V+3N~50/60 Hz	1 x 250 W	5.8 kW	10.0 A	5 x 2.5 mm ²
10 x 1/1 GN	12 kW 400 V+3N~50/60 Hz	2 x 250 W	11.6 kW	20.0 A	5 x 4.0 mm ²
15 x 1/1 GN	16 kW 400 V+3N~50/60 Hz	3 x 250 W	14.7 kW	25.0 A	5 x 6.0 mm ²

5 x 2/3 GN / 5-10-15 x 1/1 GN ANALOGIC

2.3A TECNICAL DATA TABLE FOR THE WATER SYSTEM

Convection + Humidification				
	305 5 x 2/3 GN	105 5 x 1/1 GN	110 10 x 1/1 GN	115 15 x 1/1 GN
Condensation flow rate regulator Optional - Fig. 3.0G	Ø 0.7 mm	Ø 0.7 mm	Ø 0.7 mm	Ø 0.7 mm
Combined cycle water flow rate regulator Fig. 2.3A	Ø 0.4 mm	Ø 0.4 mm	Ø 0.4 mm	2 x Ø 0.4 mm

Combi direct				
	305 5 x 2/3 GN	105 5 x 1/1 GN	110 10 x 1/1 GN	115 15 x 1/1 GN
Condensation flow rate regulator Fig. 3.0G	Ø 0.7 mm	Ø 0.7 mm	Ø 0.7 mm	Ø 0.7 mm
Steam water flow rate regulator Fig. 2.3B	Ø 0.5 mm	Ø 0.5 mm	2 x Ø 0.5 mm	2 x Ø 0.55 mm
Combined cycle water flow rate regulator Fig. 2.3B	Ø 0.4 mm	Ø 0.4 mm	Ø 0.4 mm	2 x Ø 0.4 mm