


11/2011

Mod: E17/4PF8-230-3-N

Production code: 373128



Diamond
catering equipment

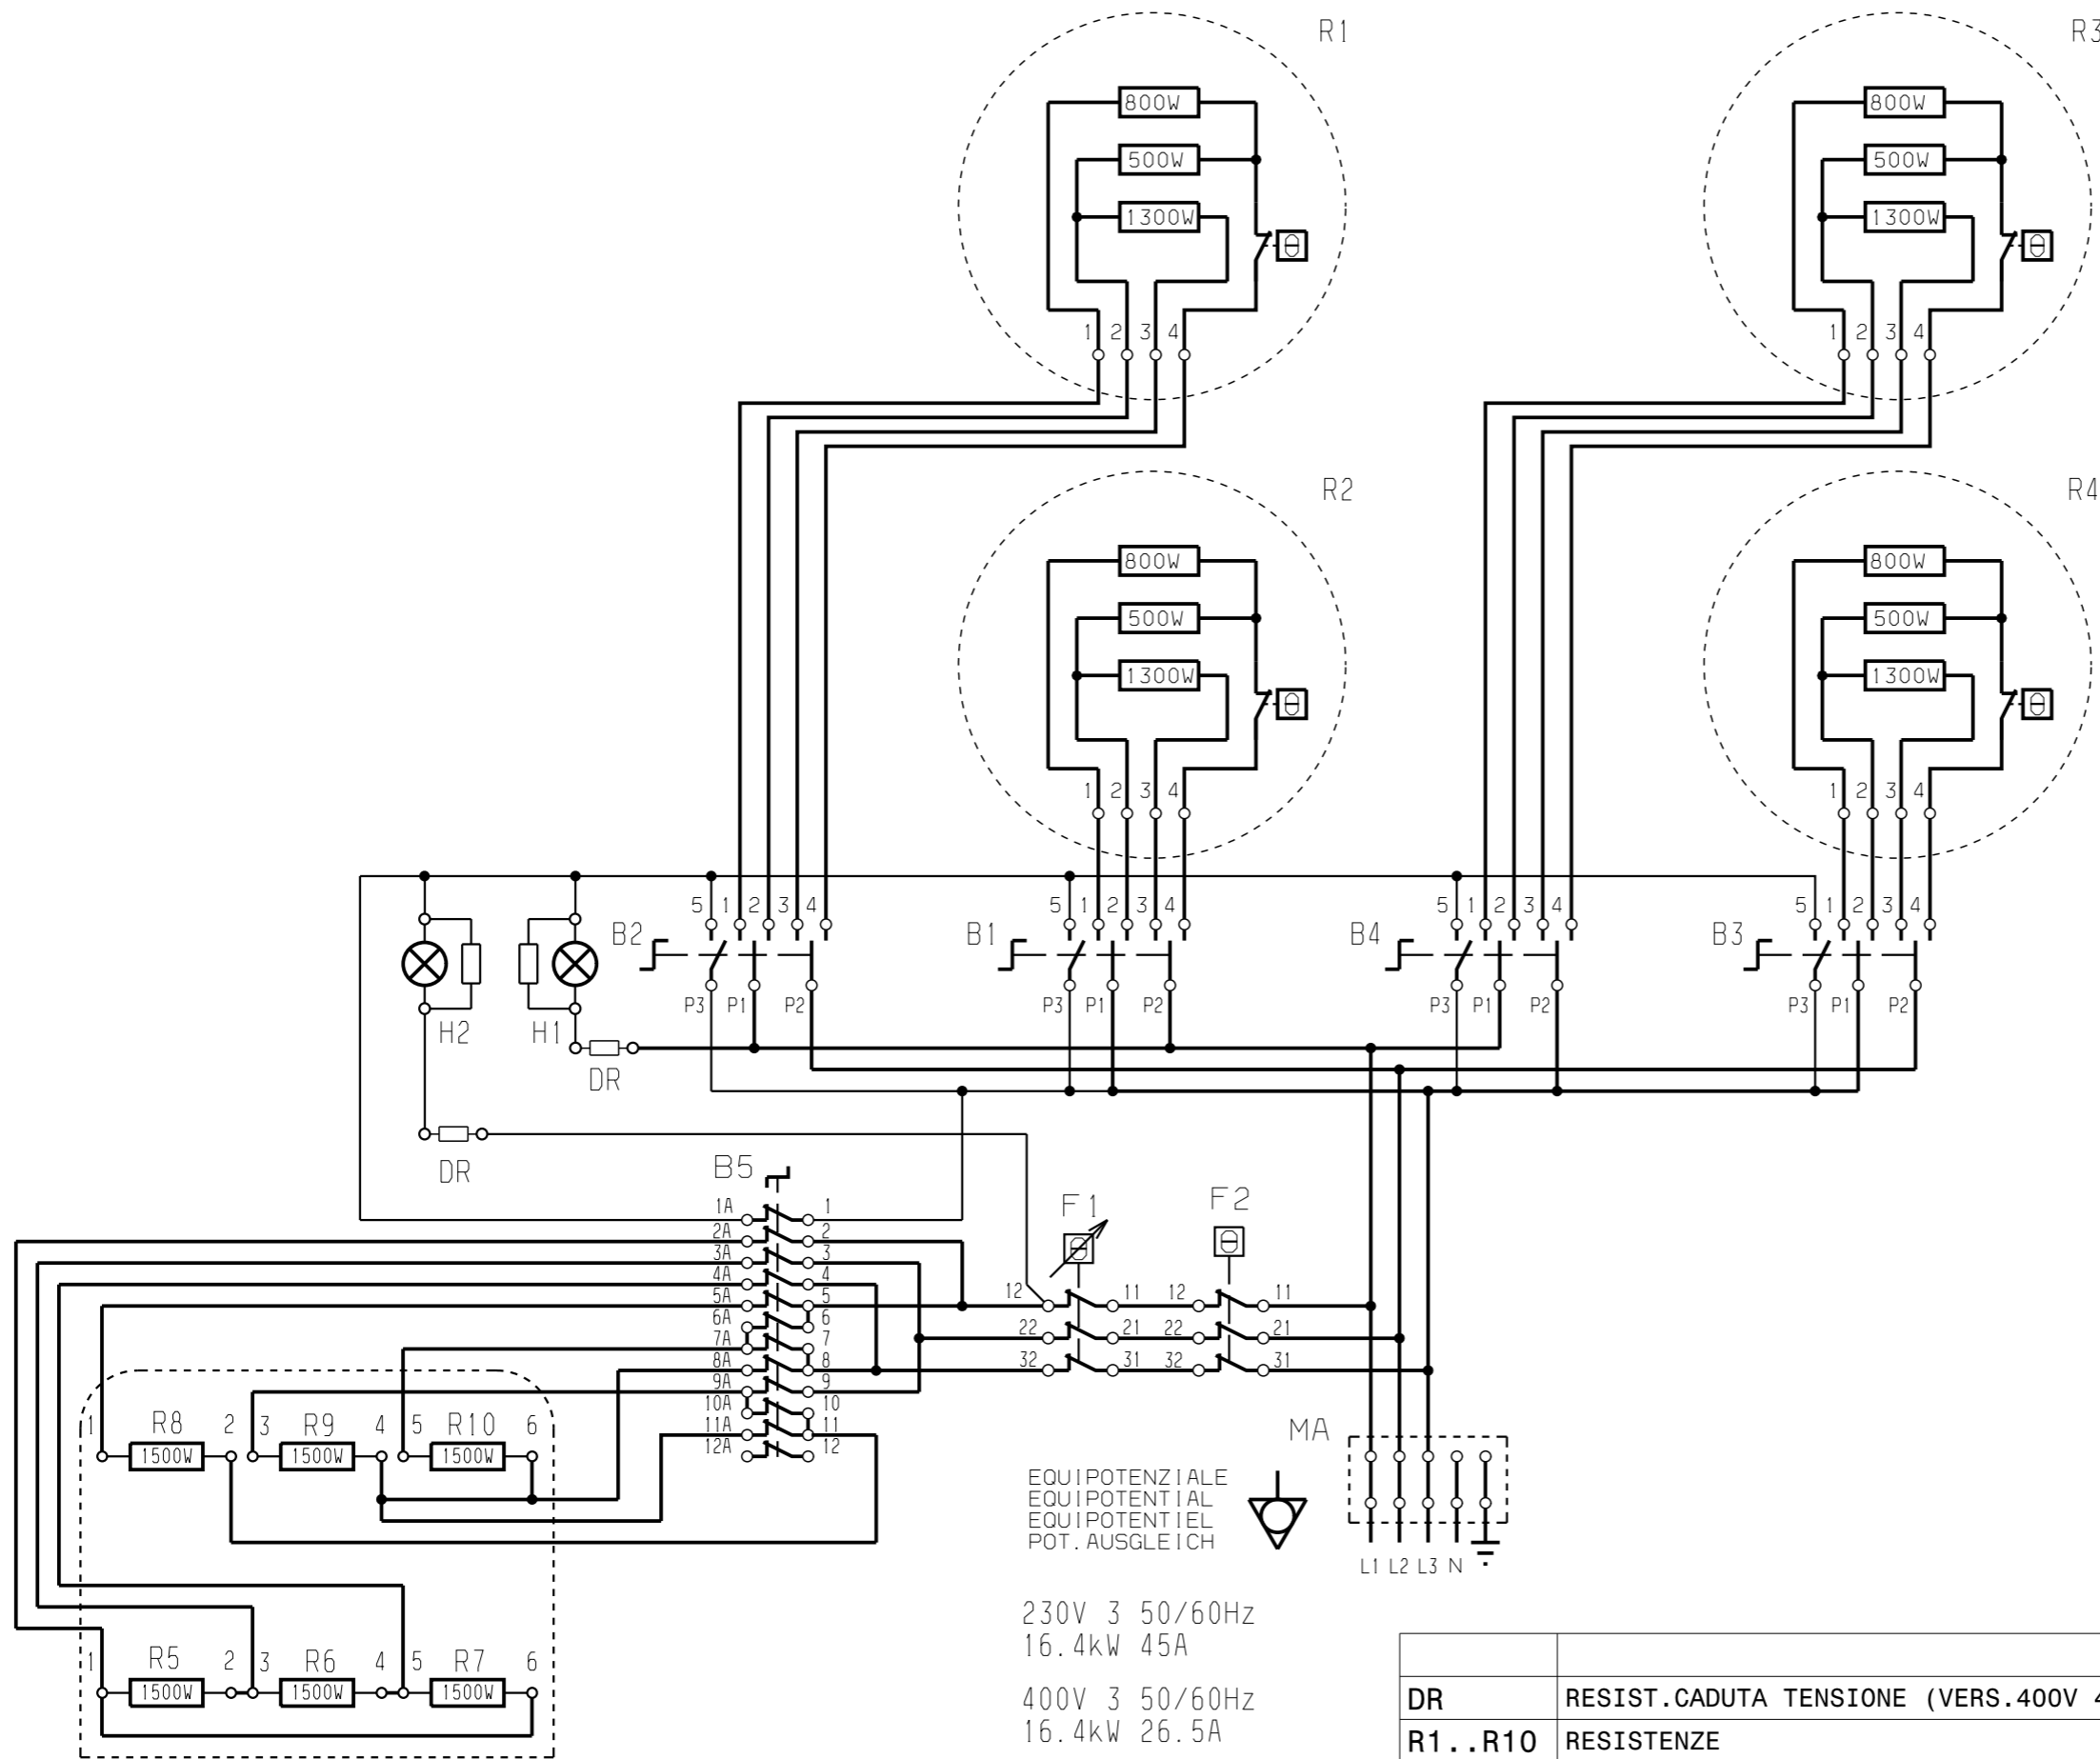

B1-B4					
POS.	5	1	2	3	4
	P3	P1		P2	
0					
6	●	●	●	●	●
5	●		●	●	●
4	●		●	●	
3	●		●		●
2	●			●	●
1	●	●		●	

B5														
POS.	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A	POS.	
	1	2	3	4	5	6	7	8	9	10	11	12		
0													☐	⊂
1	●				●	●		●	●	●			☐	⊂
2	●	●	●	●									☐	⊂
3	●	●	●	●	●		●		●		●		☐	⊂

EQUIPOTENZIALE
EQUIPOTENTIAL
EQUIPOTENTIAL
POT. AUSGLEICH



230V 3 50/60Hz
16.4kW 45A
400V 3 50/60Hz
16.4kW 26.5A
440V 3 50/60Hz
16.4kW 24A

DR	RESIST.CADUTA TENSIONE (VERS.400V 440V)	DROPPING TENSION RESIST. (VERS.400V 440V)
R1..R10	RESISTENZE	HEATING ELEMENTS
H1 -H2	LAMPADAE	LAMPS
F2	TERMOSTATO SICUREZZA	SAFETY THERMOSTAT
F1	TERMOSTATO	THERMOSTAT
B1..B5	COMMUTATORI	SWITCHES
MA	MORSETTIERA ALLACCIAMENTO	MAIN TERMINAL BOARD