

07/2012

# **Mod: G60/4BFEV6**


**Production code: 60/60 CFGE**



**Diamond**  
catering equipment

CUCINA GAS CON FORNO EL. VENTILATO  
 GAS HERD MIT UMLUFTBACKOFEN  
 GAS COOKER W/VENTILATED OVEN  
 FOURNEAU GAZ AVEC FOUR VENTIL.ELE.

CODICE  
 251.559.00

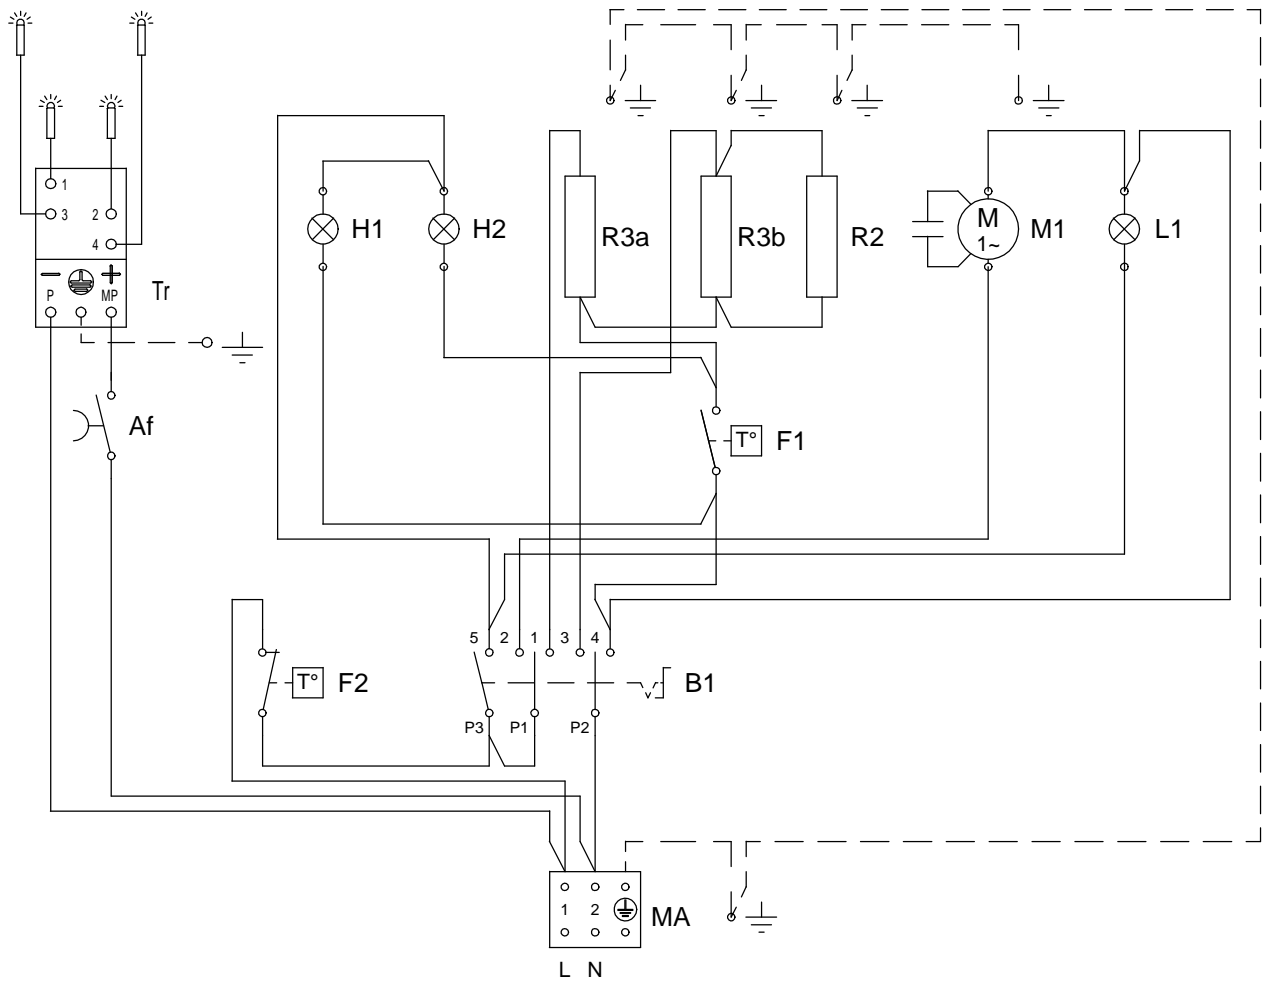

- Af PULSANTE ACCENSIONE \_ ENTZUENDUNG DRUCKKNOPF \_\_\_\_\_ COD: 663.041.00  
 IGNITION PUSH BUTTON \_ POUSSOIR D'ALLUMAGE
- B1 COMMUTATORE FORNO \_ COMMUTATEUR FOUR \_\_\_\_\_ (EGO 46.25866.824) COD: 661.074.00  
 OVEN CHANGE-OVER SWITCH \_ UMSCHALTER BACKOFEN
- F1 TERMOSTATO \_ THERMOSTAT \_\_\_\_\_ (EGO 55.19052.809) COD: 661.083.00
- F2 TERMOSTATO SICUREZZA \_ THERMOSTAT SECURITE \_\_\_\_\_ (KLIXON 165°C-10A) COD: 661.084.00  
 SAFETY THERMOSTAT \_ TEMPERATURBEGRENZER
- H1 LAMPADA SPIA VERDE \_ GREEN INDICATOR LIGTH \_\_\_\_\_ COD: 663.043.00  
 LAMPE TEMOIN VERTE \_ GRUNE KONTROLLAMPE
- H2 LAMPADA SPIA ARANCIO \_ ORANGE INDICATOR LIGTH \_\_\_\_\_ COD: 663.044.00  
 LAMPE TEMOIN ORANGE \_ ORANGE KONTROLLAMPE
- L1 LAMPADA FORNO \_ BACKOFENLAMPE \_\_\_\_\_ (15W 230V) COD: 663.045.00  
 OVEN LIGHT \_ INTERRUPTEUR LAMPE DU FOIR
- MA MORSETTIERA ARRIVO LINEA \_ POWER INLET TERMINAL BOARD \_\_\_\_\_ (PA244 3P 16A 450V) COD: 663.046.00  
 BORNES ARRIVEE LIGNE \_ ANSCHLUSSBRETT
- M1 MOTORE \_ MOTOR \_\_\_\_\_ (30W 230V) COD: 664.025.00  
 MOTEUR
- R2 RESIST. SUOLA FORNO \_ RESIST. INFERIEURE FOUR \_\_\_\_\_ 1,3kW 230V) COD: 665.081.00  
 OVEN BOTTOM HEATING ELEMENT \_ UNTERE HEIZKOERPER FUER OFEN
- R3a RESISTENZA GRILL \_ HEIZWIDERSTAND GRILL \_\_\_\_\_ (1,4kW 230V) COD: 665.082.00  
 GRILL HEATING ELEMENT \_ RESISTANCE DU GRILL
- R3b RESIST. CIELO FORNO \_ RESIST. SUPERIEURE FOUR \_\_\_\_\_ (0,9kW 230V) COD: 665.082.00  
 OVEN UPPER HEATING ELEMENT \_ OBERER HEIZKOERPER FUER OFEN
- Tr GENERATORE 4 VIE \_ 4 ABGAENGE GENERATOR \_\_\_\_\_ (220-240V/50-60Hz 0,6VA) COD: 663.042.00  
 4 OUTPUTS GENERATOR \_ GENERATEUR A 4 SORTIE

SOSTITUISCE PARI NUMERO DEL

POTENZA TOTALE - TOTAL POWER 2,245kW 230V~ 10A 50/60Hz  
 PUISSANCE TOTALE - ANSCHLUSSWERT